



**Fermi National Accelerator Laboratory**

**FERMILAB-Conf-99/069**

**50x50 GeV  $\mu^+\mu^-$  Collider Beam Collimation**

A.I. Drozhdin et al.

*Fermi National Accelerator Laboratory  
P.O. Box 500, Batavia, Illinois 60510*

April 1999

Presented Paper of the *1999 Particle Accelerator Conference*,  
New York, New York, March 29-April 2, 1999

## **Disclaimer**

*This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.*

## **Distribution**

*Approved for public release; further dissemination unlimited.*

## **Copyright Notification**

*This manuscript has been authored by Universities Research Association, Inc. under contract No. DE-AC02-76CHO3000 with the U.S. Department of Energy. The United States Government and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government Purposes.*

# 50×50 GeV $\mu^+\mu^-$ COLLIDER BEAM COLLIMATION \*

A. I. Drozhdin<sup>†</sup>, C. J. Johnstone, N. V. Mokhov, FNAL, Batavia, IL  
A. A. Garren, LBNL, Berkeley, CA  
V. M. Biryukov, Institute for High Energy Physics, Protvino, Russia

## Abstract

A summary of different techniques and systems to scrape beam halo in a 50×50 GeV  $\mu^+\mu^-$  collider is presented. Such systems are installed in a special utility section with optics specifically designed to meet both the requirements of the scraping system and of injection. Results from a realistic Monte Carlo simulation (STRUCT-MARS) show that a system consisting of steel absorbers several meters in length suppresses halo-induced backgrounds in the collider detector by more than three orders of magnitude. The heat load in superconducting magnets near the scraper system can be reduced to tolerable levels by appropriate collimator design and location. This reduction applies to both injection and collider mode of operation. Also discussed is extraction of halo particles using electrostatic deflectors and bent crystals, although neither appears to be effective for a muon collider at this energy.

## 1 INTRODUCTION

The halo-originated background in a  $\mu^+\mu^-$  collider detector arises from muons which strike and subsequently interact in the physical apertures of the machine[1, 2]. Muons lost anywhere along the lattice contribute to the source term, because they can penetrate through tens and hundreds meters of lattice components. Only with a dedicated beam cleaning system far from the interaction point (IP) can one mitigate this problem[1, 3]. Three beam halo scraping schemes are investigated here for a 50×50 GeV  $\mu^+\mu^-$  collider:

- collimation using a solid absorber,
- halo extraction using electrostatic deflectors,
- halo extraction using a bent crystal.

Previously, our studies[1, 3] showed that no absorber—ordinary or magnetized—will suffice for beam cleaning at high energies (2 TeV); in fact the disturbed muons are often lost in the IP vicinity. At 50 GeV, on the other hand, scraping muon halo with a steel absorber is exceptionally effective. The second scheme is attractive because halo muons which spill into the deflector gap are completely extracted from the machine and can be directed into a beam dump. Only those muons interacting with the septum wires appear to be lost on the limiting apertures in the machine. The third scheme with a *Si* bent crystal is inexpensive and compact, and, therefore, its efficiency is also studied in this paper.

A 50 GeV beam of  $4.2 \times 10^{12}$  muons with a normalized emittance of  $90\pi \text{ mm} \cdot \text{mrad}$  is assumed in the simulations. A utility section of about 100 m long was incorporated into the collider lattice on the side of the ring opposite to the IP[4] (Fig. 1). It consists of two identical cells with phase advance of about  $\pi$  between cells and two matching regions. A large  $\beta$ -function of 100 m in horizontal and vertical planes was designed into the lattice in order to scrape efficiently. A high dispersion is also required to intercept and scrape the tails of the energy distribution. Monte-Carlo simulations of the beam halo collimation are done in three steps. Primary muon interactions with a collimator and electrostatic deflector wires are simulated with the MARS code[5]. Multi-turn muon tracking in the collider lattice with scattering in collimators and bent crystals and the analysis of particle losses on physical apertures are performed using the STRUCT code[6] supplemented with CATCH[7]. Following this, full-scale hadronic and electromagnetic shower simulations in the collider and detector components are tracked in MARS.

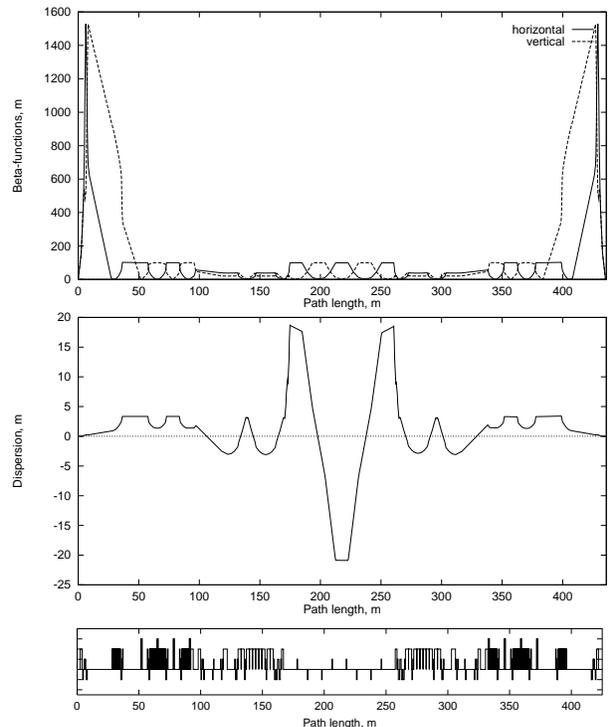


Figure 1: Muon collider  $\beta$ -functions and dispersion.

\* Work supported by the U. S. Department of Energy under contract No. DE-AC02-76CH03000

<sup>†</sup> Email: drozhdin@fnal.gov

## 2 SOLID ABSORBER

Horizontal collimators are placed in the high- $\beta$  and high-dispersion region with a  $\pi$ -phase advance between them (Fig. 2). Vertical collimators are installed in a high vertical  $\beta$  region with a  $\pi/2$  phase advance downstream of the horizontal ones. On average, 50 GeV muons lose 8% of their energy and receive a significant angular deflection (Fig. 3) after interacting with a 4 m long steel absorber. As a consequence, almost all of the scraped muons are lost in the utility section (where in this scheme conventional magnets can be used) or in the first 50 m downstream (in a superconducting part of lattice, Fig. 4).

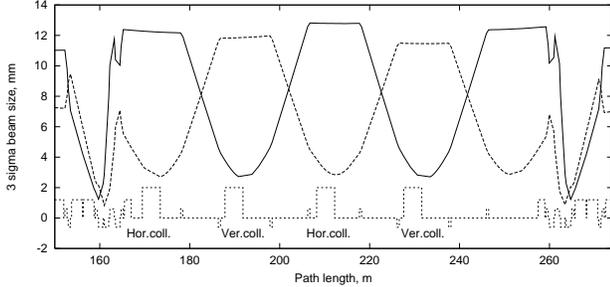


Figure 2: A  $3\sigma$  horizontal (solid) and vertical (dashed line) beam envelopes in the scraping region with an absorber.

The power density distribution in the SC coils is strongly nonuniform azimuthally, peaking—contrary to the decay-induced process—on the inner side of the magnet aperture relative to the ring center. As shown in [1], the heat load to the SC can be reduced to an acceptable level with a tungsten liner. Assuming 1% of the beam is scraped, about  $4 \times 10^6$  muons are lost at the IP over the first few turns after injection. Later—during collisions—muons hit the absorber with a very small impact parameter ( $\sim \mu\text{m}$ ) undergoing smaller orbit distortions than at the beginning of the store. Assuming 5% of the beam is scraped over the duration of the store,  $6 \times 10^7$  muons in total are lost at the IP.

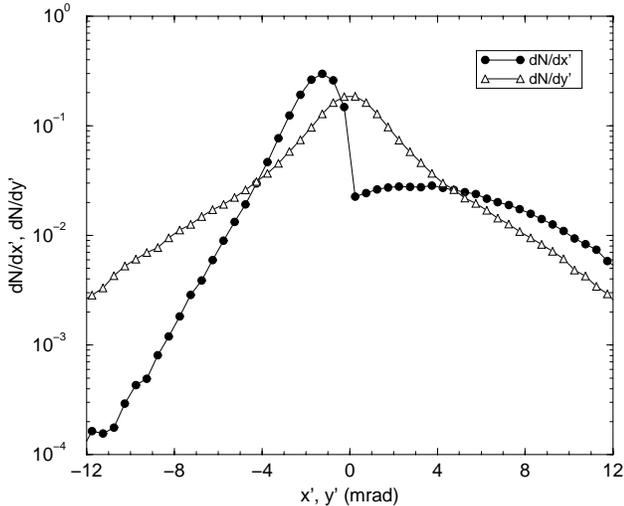


Figure 3: Muon angular distribution after a 4-m steel half-absorber ( $x > 0$ ) at 50 GeV.

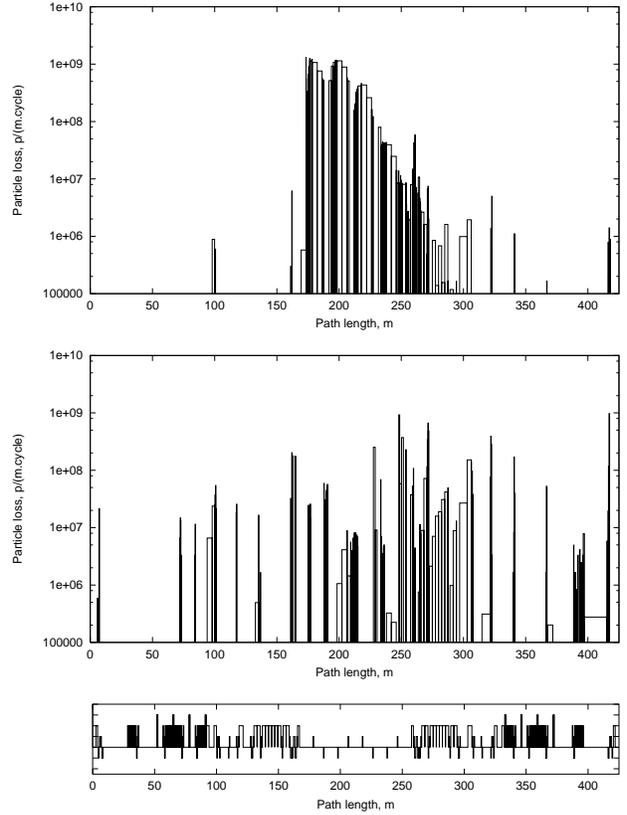


Figure 4: Beam loss at injection with scraping using a 4 m steel absorber (top) and with halo extraction (bottom).

## 3 HALO EXTRACTION

In this scheme, a horizontal scraping section consists of an electrostatic deflector  $ES(h)$  positioned at  $3\sigma$  off-axis to clean the  $\mu^+$  and  $\mu^-$  beams simultaneously, and two Lambertson magnets  $LAMB(h)$  positioned symmetrically at approximately a phase advance of  $\pi$  away from  $ES(h)$  (Fig. 5). Such a scheme extracts muons with  $\Delta p$  of both signs. Vertical halo extraction is done by a separate electrostatic deflector  $ES(v)$  and a septum-magnet  $SM(v)$  for each beam. The beam halo is separated from the circulating beam at the entrance to  $LAMB(h)$  and  $SM(v)$  (Fig. 6) which allows magnetic septa to be placed between the beams. Large amplitude and halo muons scatter from the  $ES$  wires are extracted by  $LAMB(h)$ .

In this scheme, about 86% of beam halo is extracted from the collider. Muons interacting with the  $ES$  wires, lose on average 0.2% of their energy and are mostly lost in the first 50 m downstream of the utility section (Fig. 4). Unfortunately, a significant fraction of them reaches the low- $\beta$  region upstream of IP and are lost there at the rate significantly higher than in the first scheme. With 1% of the beam scraped at injection and 5% over the store, one obtains  $3.5 \times 10^8$  and  $5 \times 10^9$  muons, respectively, lost in the IP region. It has been shown in [1, 3] that in the high-energy  $2 \times 2$  TeV  $\mu^+ \mu^-$  collider, this extraction-based scraping has a very high efficiency.

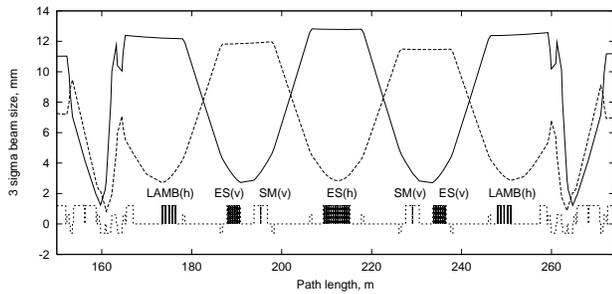


Figure 5: A  $3\sigma$  horizontal (solid line) and vertical (dashed line) beam envelope for the halo extraction section.

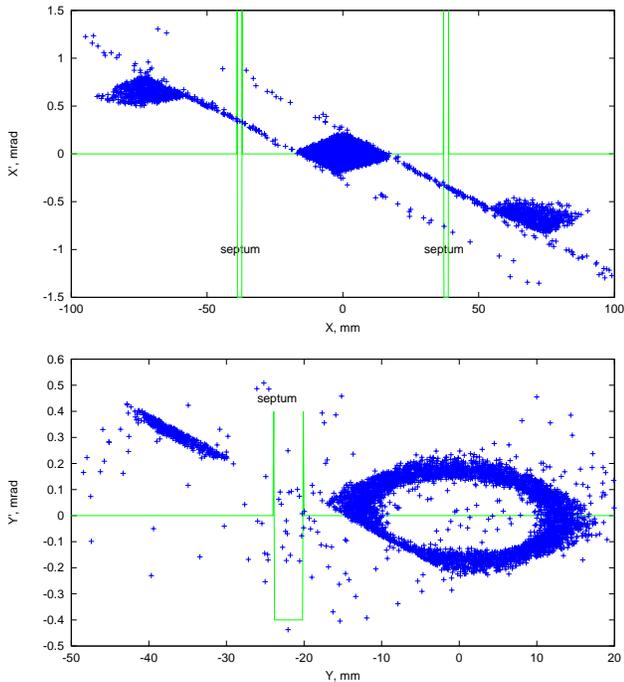


Figure 6: Halo phase space at the entrance to  $LAMB(h)$  (top) and  $SM(v)$  (bottom).

## 4 BENT CRYSTAL EXTRACTION

The  $Si$  crystal length needed to bend a 50 GeV muon beam by 3 mrad is equal to 5 mm. The natural divergence of the beam in the high- $\beta$  regions is  $\pm 0.15$  mrad and the critical angle in a  $Si$  bent crystal is  $\pm 20 \mu\text{rad}$ . Therefore one can expect an extraction efficiency of only 13%, which is unacceptably low. In addition a narrow angular acceptance requires the bent crystal to be aligned to  $\pm 5 \mu\text{rad}$  with respect to the beam. Simulations performed show that only a few percent of the beam halo is extracted from the collider at 50 GeV. The rest is scattered by the crystal as by an amorphous target, and is lost at collider apertures. The calculated background in the detector is tremendously larger compared to the first two schemes.

## 5 CONCLUSIONS

The studies of halo scraping performed for a  $50 \times 50$  GeV  $\mu^+ \mu^-$  collider show that a simple and compact absorber-based beam cleaning system provides excellent suppression of the beam loss rate and backgrounds in the collider detector vicinity. That is about hundred times better than with a system based on the halo extraction. In addition, the heat load to the superconducting magnets downstream of the non-superconducting scraping section is higher for the halo extraction scheme compared to the absorber-based system. In any case, a tungsten liner (or other methods) is needed there to protect a group of the superconducting magnets. The use of a bent crystal for halo extraction at the given muon beam parameters was found to be very inefficient.

## 6 REFERENCES

- [1] A. Drozhdin, N. Mokhov, C. Johnstone, W. Wan and A. Garren, "Scraping Beam Halo in  $\mu^+ \mu^-$  Colliders", Fermilab-Conf-98/042 (1998) and Proceedings of the 4th International Conference on Physics Potential and development of  $\mu^+ \mu^-$  Colliders, p. 242, San Francisco, CA (1997).
- [2] C. M. Ankenbrandt et al., "Status of Muon Collider Research and Development and Future Plans", Fermilab-Pub-98/179 (1998).
- [3] A. Drozhdin, C. Johnstone and N. Mokhov, " $2 \times 2$  TeV  $\mu^+ \mu^-$  Collider Beam Collimation System", Workshop on Muon Collider, Orcas Island, WA (1997).
- [4] C. Johnstone, A. Drozhdin, N. Mokhov, W. Wan and A. Garren, "An Isochronous Lattice Design for 50 on 50 GeV Muon Collider", Proceedings of the 4th International Conference on Physics Potential and Development of  $\mu^+ \mu^-$  Colliders, p. 209, San Francisco, CA (1997).
- [5] N. V. Mokhov, "The MARS Code System User Guide, Version 13(95)", Fermilab-FN-628 (1995); N. V. Mokhov et al., Fermilab-Conf-98/379 (1998); LANL Report LA-UR-98-5716 (1998); *nucl-th/9812038 v2 16 Dec 1998*; <http://www-ap.fnal.gov/MARS/>.
- [6] I. S. Baishev, A. I. Drozhdin and N. V. Mokhov. "STRUCT Program User's Reference Manuel", SSC-MAN-0034 (1994).
- [7] V. M. Biryukov, Yu. A. Chesnokov and V. I. Kotov, "Crystal Channeling and its Application at High Energy Accelerators", Berlin, Springer (1997)